

MT1000 MODULAR TRUNK AMPLIFIER



- Downstream frequency range up to 1006 MHz
- Upstream frequency range up to 204 MHz
- Optional connection to Monitoring System
- GaN output stage
- Automatic gain and slope control
- Automatic ingress management by the RSW module

GENERAL DESCRIPTION

The MT1000 trunk amplifier has 2 high level outputs - the bridge one can be divided symmetrically or asymmetrically by a passive module. They have a common gain and slope control option, while the 2 independently fed lines have 2 independently managed automatic ingress switches. The device is available with 3 different gain values. Based on this and on the modular style the amplifier can act as a key part of a larger network.

TECHNICAL SPECIFICATIONS

Forward path RF parameters

	MT1036D	MT1040D	MT1044D
Amplifier type		GaN PD hybrid	
Gain (Trunk output) [dB]	36 +2/-0	40 +2/-0	44 +2/-0
Gain (Bridge output) [dB]	40 +2/-0	44 +2/-0	48 +2/-0
Frequency range [MHz]		47...1006 ⁽¹⁾	
Equaliser breakpoint frequency [MHz]		862, 1006 ⁽²⁾	
RF attenuator range [dB]		0...22 ⁽³⁾	
RF equaliser range [dB]		0...18 ⁽⁴⁾	
Flatness [dB]		±0.75	
Return loss (40MHz -1.5dB/octave) [dB]		>18	
RF testpoint attenuation [dB]		30±1	
CTB [dB]		-73 ⁽⁵⁾	
CSO [dB]		-76 ⁽⁵⁾	
Noise-to-power ratio (NPR) maximum / Dynamic range of NPR > 42 [dB]		60 / 25 ^{(6) (7)}	
ASG insertion loss (20°C) [dB]		6.5	
ASG control range [dB]		±4	
ASG flatness [dB]		±0.5	
Noise figure [dB]		7	
Output splitter, directional coupler (Bridge out) [dB]		Plug-in 4, 8, 12, 16, 20	

Specifications are subject to change without notice!

Reverse path RF parameters

	MT10xxD-xx-20	MT10xxD-xx-25
Gain [dB]	20±1	25±1
Frequency range [MHz]	5...204	
Diplex filter [MHz]	65/85, 85/105, 204/258	
RF attenuator range [dB]	0...22 ⁽³⁾	
RF equaliser range [dB]	0...14 ^{(3) (8)}	
Flatness [dB]	±0.75	
Input return loss (40MHz -1.5dB/octave) [dB]	>18	
RF testpoint attenuation [dB]	30±1	
Ingress control switch (RSW) states	0dB/-6dB/-50dB, 0dB/-6dB/-50dB/HPF20	
Noise-to-power ratio (NPR) maximum / Dynamic range of NPR > 36 [dB]	57 / 27 ^{(9) (10)}	


General parameters

RF connector	5/8"
Power supply voltage [VAC]	~ 30..65, □ 35...90
Maximum power consumption [W]	38
Maximum current feed-through [A]	10
Hum modulation [dB]	70
Screening factor [dB]	80
Degree of protection	IP65
Operational temperature range [°C]	-40...+60
Dimensions [mm]	275x200x122
Weight [kg]	4.1

- (1) Lower frequency limit is defined by the diplexer
- (2) Breakpoint is defined by the mounted equaliser modules
- (3) 2 dB steps (in case of attenuators 1 dB steps are possible between 0 dB and 5 dB)
- (4) 2 dB steps. In case of breakpoint of 1006 MHz the range is limited at 16 dB
- (5) 60 dBmV at 1006 MHz, 18 dB extrapolated tilt, 79 analog + 75 digital channels (-6 dB offset)
- (6) Measured with flat full spectrum load between 85 and 1006 MHz
- (7) NPR_{max} at TCP = 65 dBmV
- (8) In case of breakpoint of 65 MHz and 85 MHz the range is limited at 12 dB
- (9) Measured with flat full spectrum load between 5 and 204 MHz
- (7) NPR_{max} at 39 dBmV/channel

Specifications are subject to change without notice!

BLOCK DIAGRAM

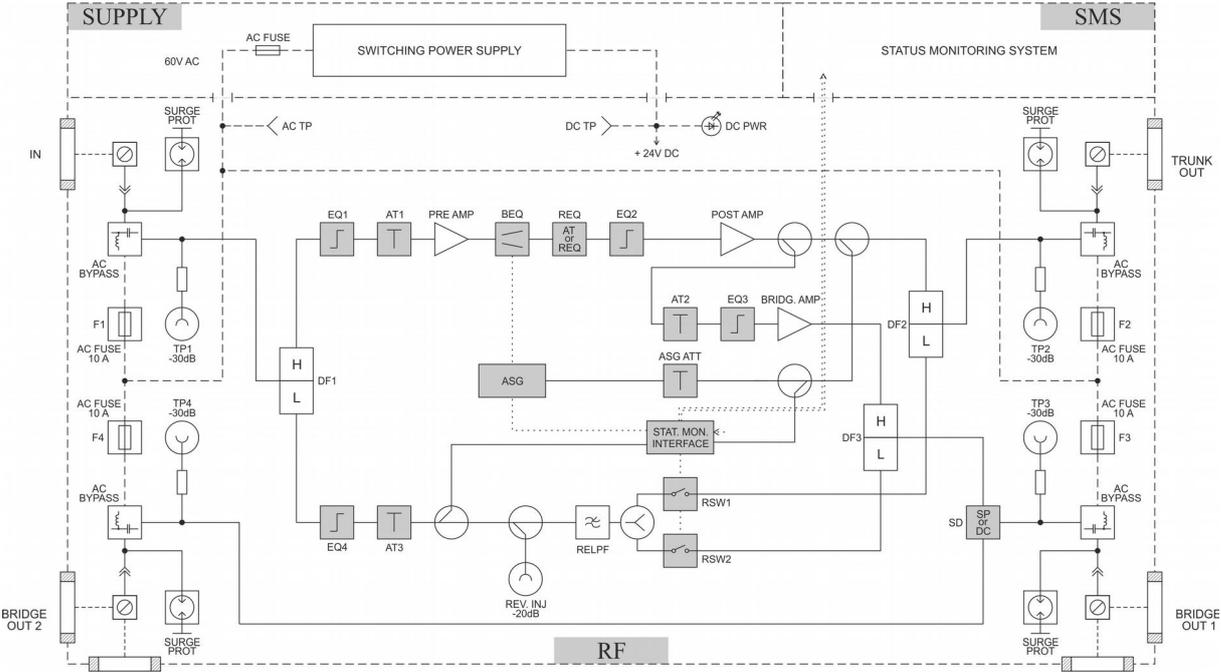

Specifications are subject to change without notice!

ORDERING INFORMATION _____

M **T** **1** **0** **X** **X** **D** - **X** **X** - **X** **X**

↓

Forward path gain	
36	Minimum 36 dB
40	Minimum 40 dB
44	Minimum 44 dB

↓

Type of the diplex filter	
65	Pluggable 65/85MHz diplex filter
85	Pluggable 85/105MHz diplex filter
204	Pluggable 204/258MHz diplex filter

↓

Reverse path gain	
20	20 dB
25	25 dB

Option	Required modules	Ordering codes
ASG option	1pc ASGxxx-C, 1pc BEQxxx-A, 1pc ATxx	ASGxxx-C, BEQxxx-A, ATxx
Monitoring option	1pc NMT-FE, 2pc RSW2-A or 2pc RSW2-H20	NMT-FE, RSW-2A, RSW2-H20
Wall mount kit	1pc WMK-1 (double)	WMK-1

Specifications are subject to change without notice!