




Multiswitches 1 SAT + TER

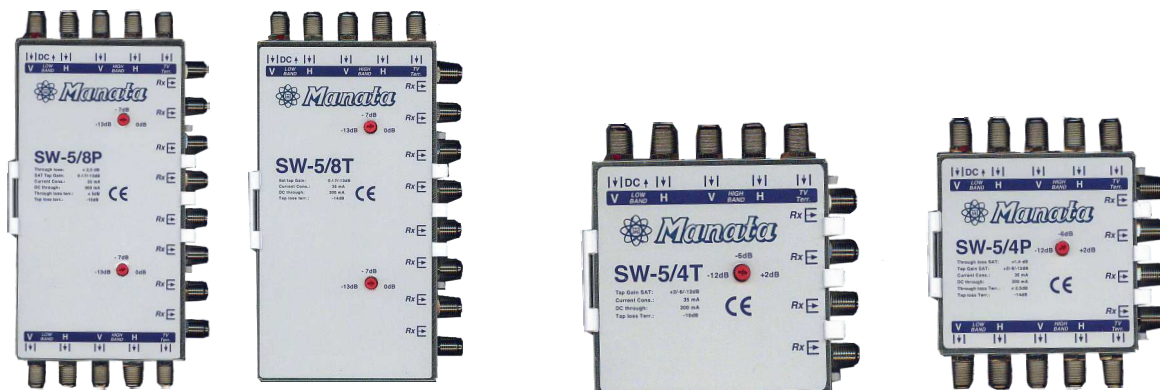

REF.	SW - 5/4P	SW - 5/4T	SW - 5/8P	SW - 5/8T
INPUTS	4 SAT + 1 TER			
OUTPUTS	4SAT + 1TER	-	4SAT + 1TER	-
TAPS/REC	4		8	
FREQ. RANGE SAT MHz	950 - 2200			
THROUGH LOSS SAT dB	<3	-	<3	-
TAP LOSS dB	0		<2	
FREQ. RANGE RETURN PATH SAT MHz	5...100			
RETURN PATH LOSS dB	<13		<16	
FREQ. RANGE TER. MHz	5...862			
THROUGH LOSS TER. dB	<3	-	<6	-
TAP LOSS TER. dB	<14		<18	
ISOLATION RANGE HIGH/LOW dB	<30			
ISOLATION H/V dB	<25			
ISOLATION SAT/TER dB	<40			
INPUTS ISOLATIONS dB	<35			
OUTPUT ISOLATIONS dB	<35			
RETURN LOSS IN/OUT	<12			
MAXIMUM OUTPUT LEVEL SAT	100 dBμV EN 50083-5			
CONSUMPTION	60mA a 18 VDC			
MAX. SUPPLY TO LNB mA	300			
DIMENSIONS mm	96×91×27	85×91×27	160×91×27	149×91×27