
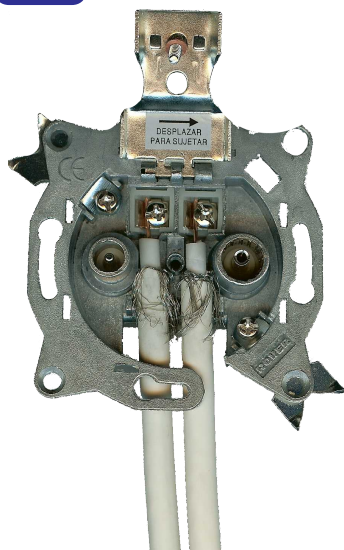


Adapte for use outside

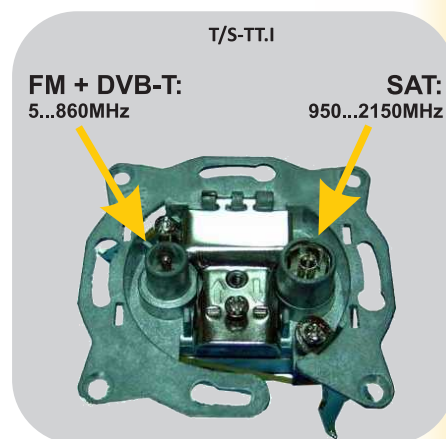

REF.		TOM-2T-I	TOM-2P-I	T/S-TT.I		T/S-TV-RD
BAND RANGE	MHz	40-860		5 - 860	950 - 2150	40-2150
ATTENUATION INSERTION	dB	0,5		< 2,5dB @ 5 MHz < 0,6dB @ 470MHz < 2,5dB @ 862MHz > 25dB @ 950MHz	> 30dB @ 862MHz < 1,4dB @ 950MHz < 1,5dB @ 2150MHz	-
TAP LOSS	dB	2,5	3	2,5		2,5 - 40/860 0,5 - 950/2300
TV CONNECTOR		IEC Male 9,5 mm Ø				
FM CONNECTOR		IEC Female 9,5 mm Ø				
SAT CONNECTOR		IEC Female 9,5 mm Ø				TYPE "F"
CURRENT PASSAGE - SAT		-		300 mA Max.		